
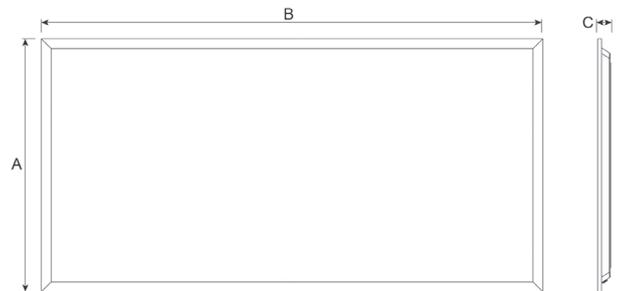



Eco 50W 1200x600 (UGR<19) TP(a)

4000K 5860Lm Recessed Backlit LED Panel

PXECO126V3

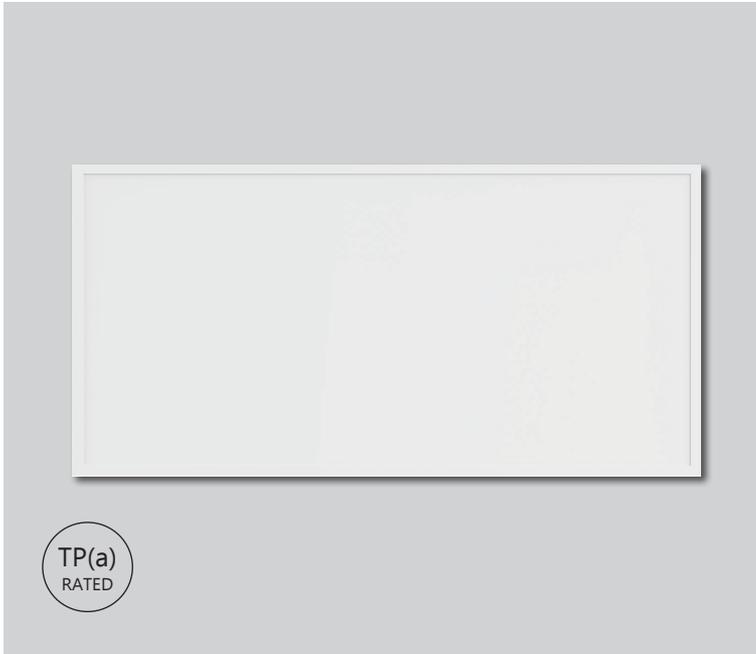

Dimensions (mm)	A	B	C
	595	1195	26



Dimensions (mm)	1195*595*26
Weight (kg)	3.75Kg
Material	Aluminium, PMMA Lens, TP(a) Diffuser
Colour/Finish	White
IK Rating	IK02
Voltage/Frequency	200-240V 50/60Hz
Luminous Flux	5860Lm
Luminous Efficacy	117.2Lm/W
Color Rendering Index	≥80
CCT Colour Temp	4000K
SDCM Colour Consistency	<6
UGR Unified Glare Rating	UGR<19
LEDs	SMD 66pcs
Light Control	On/Off
Beam Angle	90°
Adjustable	No
Chip	Jufeii
IP Rating	IP20
Maintained Luminous Flux	50,000h (L80B10), 65,000h (L70B50)
Warranty	5 years

Features & Applications

- Backlit LED Panel with TP(a) Rated Diffuser.
- Lumen Output: 5860Lm, Efficacy: 117Lm/W.
- Installation: Recessed/Suspended/Surface.
- External Driver.
- UGR<19 Anti Glare.

Ideal Application Areas Include:

Schools/Colleges, Office Developments, Retail Premises, Hotels and Leisure Facilities, Hospitals and Public Buildings.

Options Available	
Driver (DALI)	PXDADRY50WK
Emergency Pack	PXEMPACK
Recessed Clip	PXECOCLIP
Suspension Kit	PXECOWIREK
Deep Surface Kit	PXECOKIT126