


Valo V2 100W 4000K Datasheet

15,000lm LED Street Light C5 1000H SALT SPRAY TEST

PXVALO100WV2



Complete with NEMA Socket

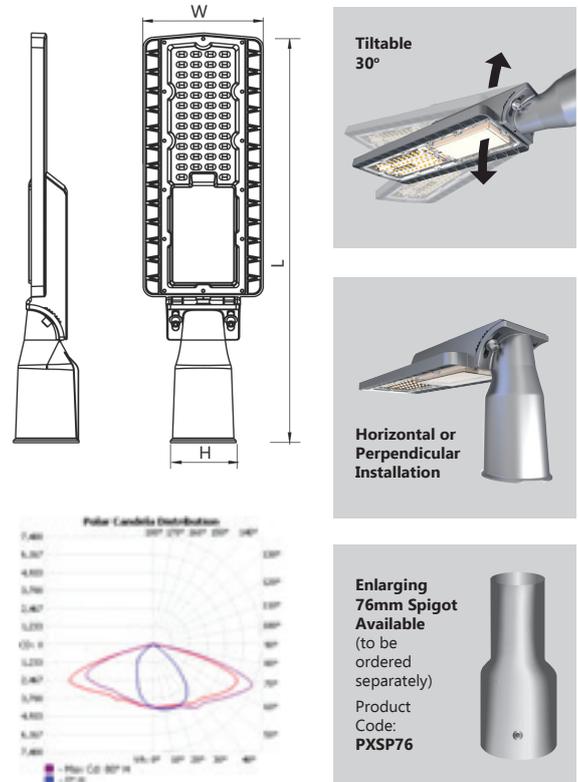

		100W	IP66	LED	240V
--	--	-------------	-------------	------------	-------------

Dimensions	655*200*130mm
Wattage	100W
Weight	3.35kg
Material	Aluminum+PC
Colour/Finish	RAL9023
IK Rating	IK08
Voltage/Frequency	AC200-240V/50-60Hz
Luminous Flux	15,000Lm
Luminous Efficacy	150Lm/W
Color Rendering Index	≥70
Colour Temperature	4000K
SDCM Colour Consistency	≤6
UGR Unified Glare Rating	-
LEDs	SMD 3030 175pc
Light Control	On/Off
Beam Angle	Type II, Medium
Adjustable	-15 to +15 degrees
Chip	Edison
IP Rating	IP66
Maintained Luminous Flux	50,000h (L80B10), 65,000h (L70B50)
Warranty	5 years

Features & Applications

- C5 1000h Salt Spray Test
- Tiltable 30°
- 4000K colour temperature
- Highly efficient 150 Lm/W
- Excellent photometric design
- Complete with NEMA socket
- IP66 protection rating
- 60mm pole diameter size
- 76mm spigot available (to be ordered separately)
- 65,000 hour lifetime (L70B50)
- Excellent heat dissipation to extend the life of the LEDs.
- 5 year warranty

Options Available	
Wall Bracket	PXVALOWBK
76mm Spigot	PXSP76
Photocell Kit Code	PXPCHEAD