

Product datasheet

Specifications



Transparent boot, Harmony XB4, for 22mm circular projecting push button

ZBP0

Main

Range of product	Harmony XB5 Harmony XB4
Accessory / separate part type	Single boot
Product or component type	Transparent boot
Accessory / separate part category	Protection accessories
Accessory / separate part destination	Projecting push-button
Shape	Round
Quantity per set	Set of 10

Complementary

Colour	Transparent
Net weight	0.002 kg

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	1.800 cm
Package 1 Width	3.000 cm
Package 1 Length	3.000 cm
Package 1 Weight	2.600 g
Unit Type of Package 2	BB1
Number of Units in Package 2	10
Package 2 Height	9.000 cm
Package 2 Width	7.000 cm
Package 2 Length	7.000 cm
Package 2 Weight	43.000 g
Unit Type of Package 3	S03
Number of Units in Package 3	400
Package 3 Height	30.000 cm
Package 3 Width	30.000 cm
Package 3 Length	40.000 cm
Package 3 Weight	2.170 kg

Logistical informations

Country of origin FR

Contractual warranty

Warranty 18 months

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

Environmental footprint

Carbon footprint (kg.eq.CO2 per CR, Total Life cycle)	1
---	---

Use Better

Materials and Substances

Packaging made with recycled cardboard	Yes
--	-----

Packaging without single use plastic	Yes
--------------------------------------	-----

EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope)
-----------------------------------	--

REACH Regulation	REACH Declaration
------------------	-----------------------------------

Use Again

Repack and remanufacture

Take-back	No
-----------	----

Offer Marketing Illustration

Product benefits / Features


Technical Benefits

Harmony XB4

Conformity with IEC, UL, CSA, CCC EAC, and JIS standards, as well as CE marking and marine approvals

Up to IP66, 67, 69, 69K, and type 4X protection ratings

High vibration resistance with shake-proof terminal screws

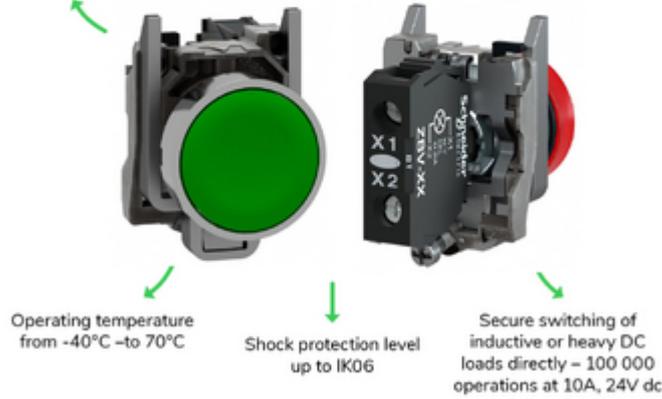

Operating temperature from -40°C to 70°C

Shock protection level up to IK06

Secure switching of inductive or heavy DC loads directly – 100 000 operations at 10A, 24V dc

Offer Marketing Illustration

Product benefits / Features

Features
Harmony XB4

-  Quick and easy assembly and disassembly
-  Excellent mechanical connection with operator head
-  Various types of connection: screw clamp, connector, Faston connector, spring terminal, or printed circuit board
-  Large set of accessories to customize your panels
-  Robustness to withstand harsh environments

Image of product / Alternate images

Alternative





