

Series D Flashing ECO-LED Beacon


PSD/DC/12-36/SML/GREEN



deegee PSD IP65 Pulsed SML Beacon 12-36Vdc White Base 102mm x 79mm dia. Green

A value-focused version of our Pulsed LED beacon, crafted as a replacement for the legacy B15d Filament Lamp PSD. Features include Static (non-flashing) and Pulsed operation at 120fpm (2Hz), selectable via customer connections or a jumper-link for remote control.

- Extremely versatile - clear LEDs allow lenses to determine colour, therefore less stock holding is required
- Protective guard and mounting bracket available
- Can be mounted in any orientation
- 360° light output around the vertical axis

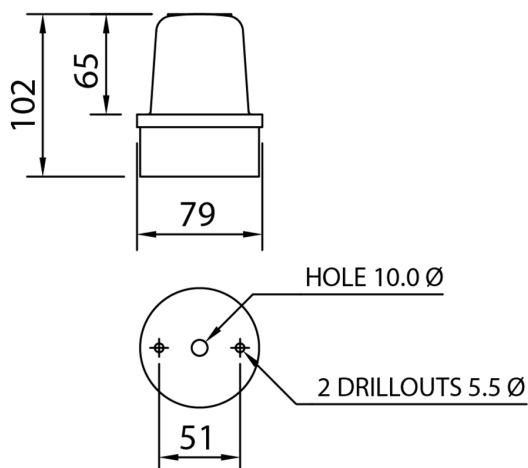

General Data

Size (mm)	102mm x 79mm dia.
Weight (kg)	0.128
IP Rating	IP65
Mounting Method	Surface mounting
Order Unit	1
Base Colour	White
Base Material	ABS
Lens Material	Polycarbonate
Lens Colour	Green
Temperature Limits (C)	-20 to +45

Electrical Data

Nominal Supply Voltage (V)	12-36
Supply Type	DC
Voltage Min (V)	10
Voltage Max (V)	40
Nominal Current Draw (A)	0.086
User Selectable Functions	Pulse/Static
Fuse (A)	0.5
Fuse Type	TD
Fuse (Internal or External)	External

Visual Data

Signal Colour	Green
---------------	-------

Series D Flashing ECO-LED Beacon

PSD/DC/12-36/SML/GREEN



Light Source	LED
Factory Set Flashing Frequency (FPM)	120
Luminous Intensity (Cd)	5

Trade Data

GTIN	5056711302242
Commodity Code	85318070
Country of Origin	GB
RoHS	RoHS3 (EU DIRECTIVE 2015/863) compliant
RoHS Last Verified Date	8th August 2024
SVHC	No SVHC present
SVHC Candidate List Date	27th June 2024