

Series D Flashing ECO-LED Beacon


PSD/UC/24-230/SML/AMBER



deegree PSD IP65 Flashing SML Beacon 24-230Vuc White Base 102mm x 79mm dia. Amber

An affordable variant of our Pulsed LED beacon, developed to replace the outdated B15d Filament Lamp PSD. Offers Static and Pulsed (120fpm, 2Hz) modes, selectable via customer connections or a jumper-link for remote customization.

- Extremely versatile - clear LEDs allow lenses to determine colour, therefore less stock holding is required
- Protective guard and mounting bracket available
- Can be mounted in any orientation
- 360° light output around the vertical axis

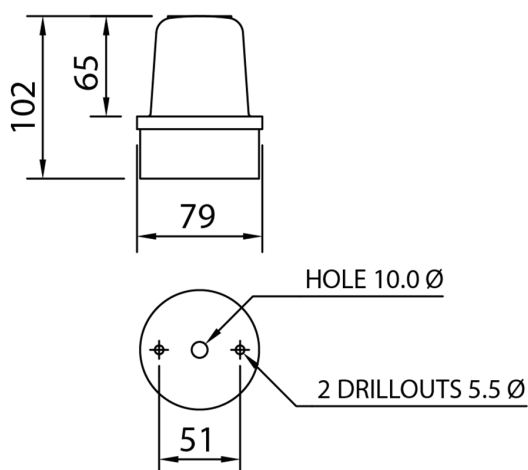

General Data

Size (mm) 102 x 79 dia.

Weight (kg) 0.144

IP Rating IP65

Mounting Method Surface Mounting

Order Unit 1

Base Colour White

Base Material ABS

Lens Material Polycarbonate

Lens Colour Amber

Temperature Limits (C) -20 to +45

Electrical Data

Nominal Supply Voltage (V) 24-230

Supply Type UC

Voltage Min (V) 21

Voltage Max (V) 264

Nominal Current Draw (A) 0.018 - 0.112

User Selectable Functions Pulsed / Static


Fuse (A) 0.5

Fuse Type TD

Fuse (Internal or External) External

Visual Data

Signal Colour Amber

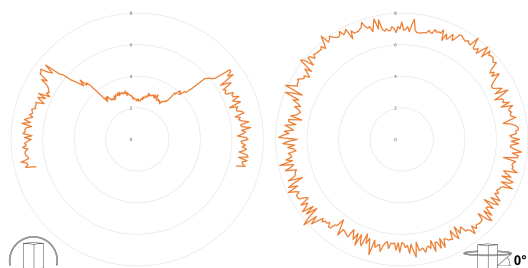

Series D Flashing ECO-LED Beacon

PSD/UC/24-230/SML/AMBER



Light Source	LED
Factory Set Flashing Frequency (FPM)	120
Luminous Intensity (Cd)	8

Trade Data

GTIN	5060995741680
Commodity Code	85318070
Country of Origin	GB
CE Approved	Yes
RoHS	RoHS3 (EU DIRECTIVE 2015/863) compliant
RoHS Last Verified Date	8th August 2024
SVHC	No SVHC present
SVHC Candidate List Date	27th June 2024