


Series D Flashing ECO-LED Beacon

PSD/UC/24-230/SML/GREEN

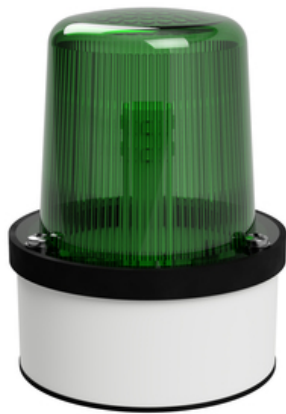

deegree PSD IP65 Flashing SML Beacon 24-230Vuc White Base 102mm x 79mm dia. Green

A value version of our popular Pulsed LED beacon designed with the single aim of replacing the legacy B15d Filament Lamp version of the PSD.

Dual-function Static - non-flashing & Standard Pulse - 120fpm (2Hz). Pulsed/Static operation selected by either customer connection or jumper-link allowing for remote function selection as required.

- Extremely versatile - clear LEDS allow lenses to determine colour, therefore less stock holding is required
- Protective guard and mounting bracket available
- Can be mounted in any orientation
- 360° light output around the vertical axis

General Data

Size (mm) 102 x 79 dia.

Weight (kg) 0.144

IP Rating IP65

Mounting Method Surface Mounting

Order Unit 1

Base Colour White

Base Material ABS

Lens Material Polycarbonate

Lens Colour Green

Temperature Limits (C) -20 to +45

Electrical Data

Nominal Supply Voltage (V) 24-230

Supply Type UC

Voltage Min (V) 21

Voltage Max (V) 264

Nominal Current Draw (A) 0.018 - 0.112



User Selectable Functions Pulsed / Static

Fuse (A) 0.5

Fuse Type TD

Fuse (Internal or External) External

Visual Data

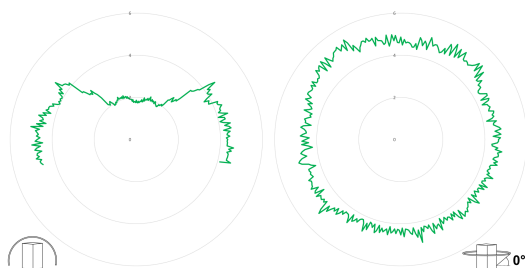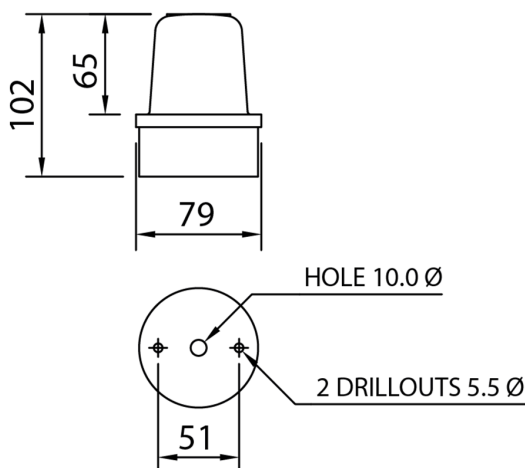

Series D Flashing ECO-LED Beacon

PSD/UC/24-230/SML/GREEN



Signal Colour	Green
Light Source	LED
Factory Set Flashing Frequency (FPM)	120
Luminous Intensity (Cd)	6

Trade Data

GTIN	5060995741697
Commodity Code	85318070
Country of Origin	GB
CE Approved	Yes
RoHS	RoHS3 (EU DIRECTIVE 2015/863) compliant
RoHS Last Verified Date	8th August 2024
SVHC	No SVHC present
SVHC Candidate List Date	27th June 2024