
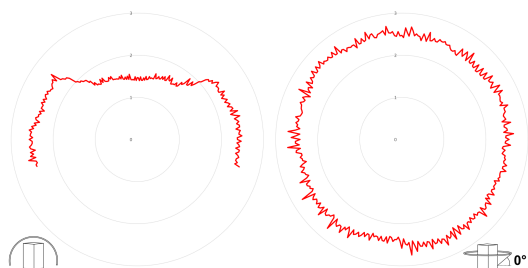


Series D Flashing ECO-LED Beacon

PSD/UC/24-230/SML/RED

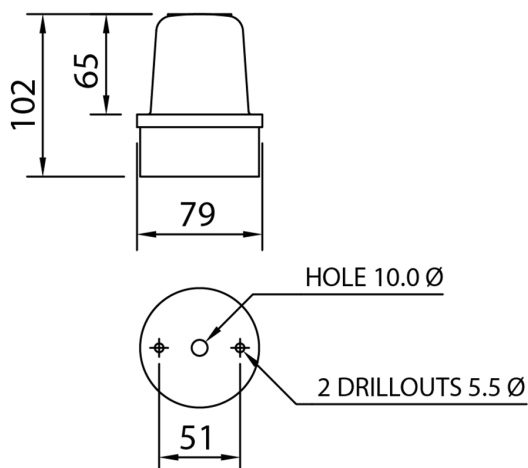

deegee PSD IP65 Flashing SML Beacon 24-230Vuc White Base 102mm x 79mm dia. Red

A cost-effective alternative to our renowned Pulsed LED beacon, specifically created to replace the legacy B15d Filament Lamp version of the PSD. It features dual functionality: Static (non-flashing) and Standard Pulse at 120 flashes per minute (2Hz). The Pulsed/Static mode can be selected via customer connection or a jumper link for remote configuration.

- Extremely versatile - clear LEDS allow lenses to determine colour, therefore less stock holding is required
- Protective guard and mounting bracket available
- Can be mounted in any orientation
- 360° light output around the vertical axis

General Data

Size (mm)	102 x 79 dia.
Weight (kg)	0.144
IP Rating	IP65
Mounting Method	Surface Mounting
Order Unit	1
Base Colour	White
Base Material	ABS
Lens Material	Polycarbonate
Lens Colour	Red
Temperature Limits (C)	-20 to +45

Electrical Data

Nominal Supply Voltage (V)	24-230
Supply Type	UC
Voltage Min (V)	21
Voltage Max (V)	264
Nominal Current Draw (A)	0.018 - 0.112
User Selectable Functions	Pulsed / Static
Fuse (A)	0.5
Fuse Type	TD
Fuse (Internal or External)	External

Visual Data

Series D Flashing ECO-LED Beacon

PSD/UC/24-230/SML/RED



Signal Colour	Red
Light Source	LED
Factory Set Flashing Frequency (FPM)	120
Luminous Intensity (Cd)	3

Trade Data

GTIN	5060995741673
Commodity Code	85318070
Country of Origin	GB
CE Approved	Yes
RoHS	RoHS3 (EU DIRECTIVE 2015/863) compliant
RoHS Last Verified Date	8th August 2024
SVHC	No SVHC present
SVHC Candidate List Date	27th June 2024