


## Universal Emergency Kit Datasheet

IP20 Universal Convertor Pack - 3/4h @3W

PXEMPACK

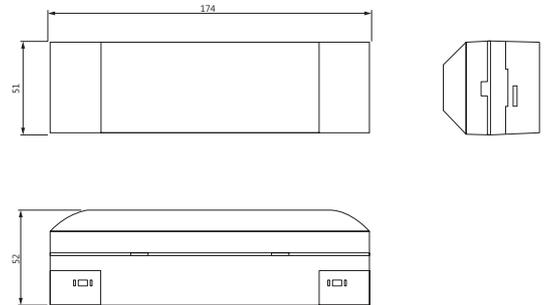

<b>Suitability</b>	3-60W Fixture
<b>Based at:</b>	18-80V DC
<b>Input</b>	200-240V 50/60Hz 3W
<b>Output Voltage</b>	18-80V
<b>Input Current</b>	0.03A Max
<b>Ta</b>	-10 - +55 Degrees
<b>Tc</b>	70 Degrees
<b>Charging Time</b>	24 Hours
<b>Battery Type</b>	LiFePO4
<b>Emergency Time</b>	3-4 Hours
<b>Type</b>	Switchable Maintained 3W LED
<b>Dimensions</b>	174x51x52mm
<b>IP Rating</b>	IP20
<b>Fitting Warranty</b>	5 Years
<b>Battery Warranty</b>	2 Years
<b>Certification</b>	CE
<b>Product Code</b>	PXEMPACK

## Features & Applications

The Prelux Universal Emergency Convertor Kit enables the conversion of standard 3-60W LED luminaires into emergency fittings.

Complete with LiFePO4 Lithium battery pack, this switchable maintained kit provides 3W for 3-4hrs in emergency mode. The kit also comes with a 5 year fitting warranty and a 2 year battery warranty.